

Light Measurement Results

Laboratory and Equipment

Test lab	n/a
Spectrometer Manufacturer and Model	n/a, n/a – n/a
Measurement date	1/31/2026

Measurement Conditions

Tested c-planes	24
Tested gamma angles	37 – 5.00°
Input Power	9.16 W


Tested Light Source

Luminaire	RIM-10203-30
Basic Luminous Shape	PANEL
Item No.	
Manufacturer	RIMCLED

Main Light Measurement Results


Output – Total Lumen (Up% / Down%)	429.2 lm – 0.0094% / 99.99%
Efficiency	46.85 lm/W
Peak Intensity	704.8 cd
Correlated Color Temperature, CCT	3151 K
Color Rendering Index	CRI 95.2

Polar light distribution diagram

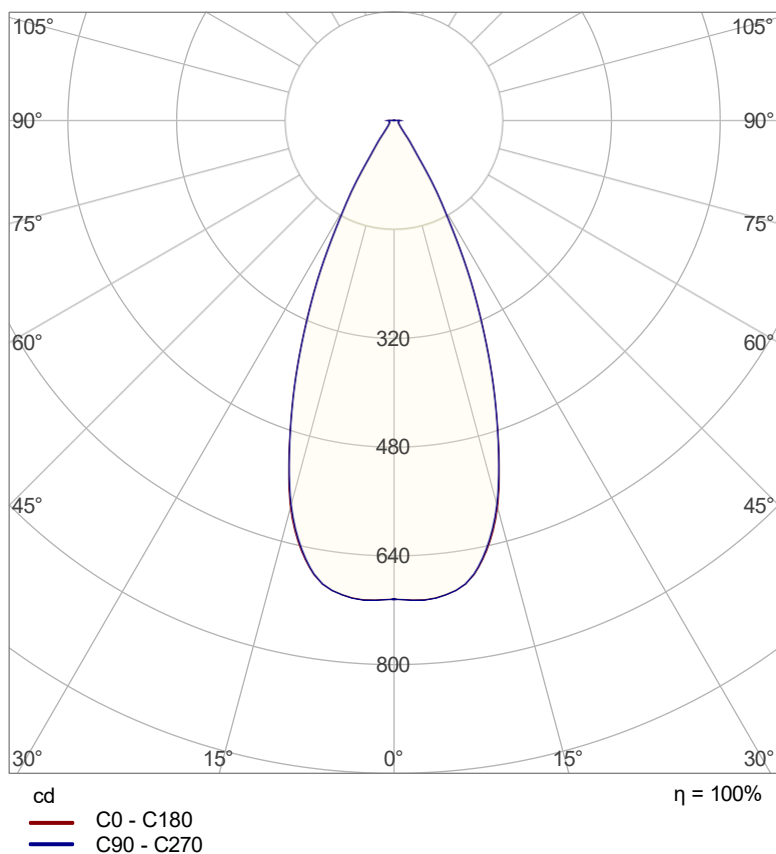


Light Measurement Results

Beam details

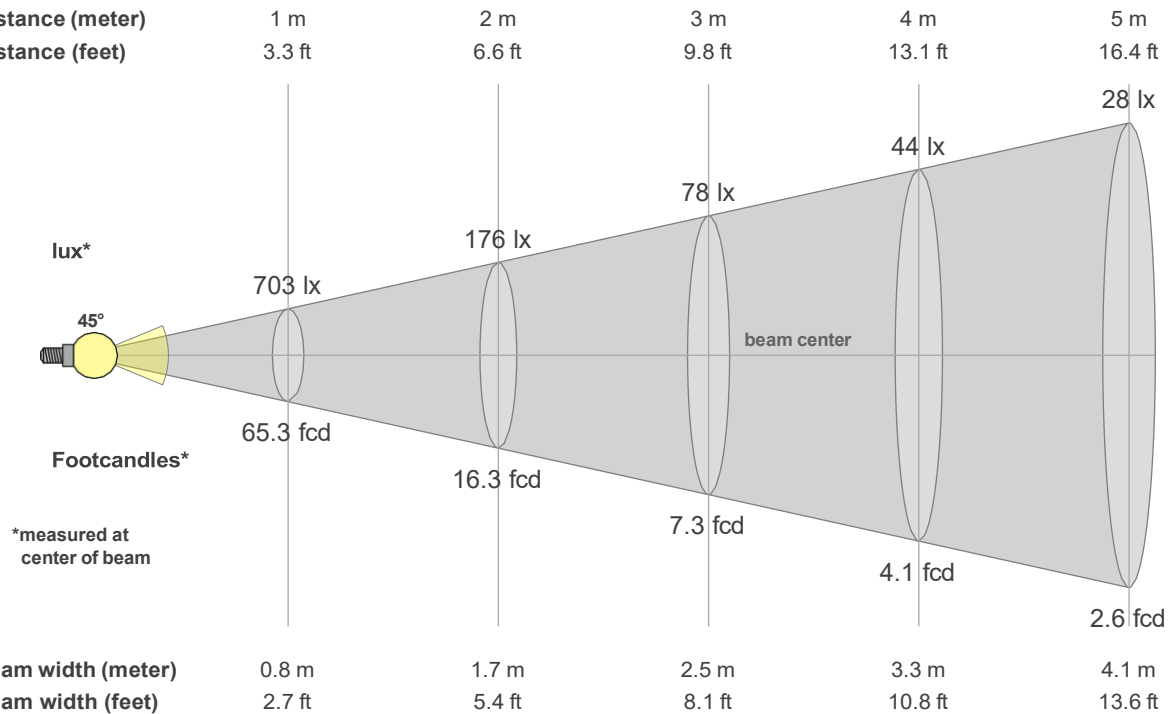


Luminaire budgetary diagram

LAMPS (number of lamps)

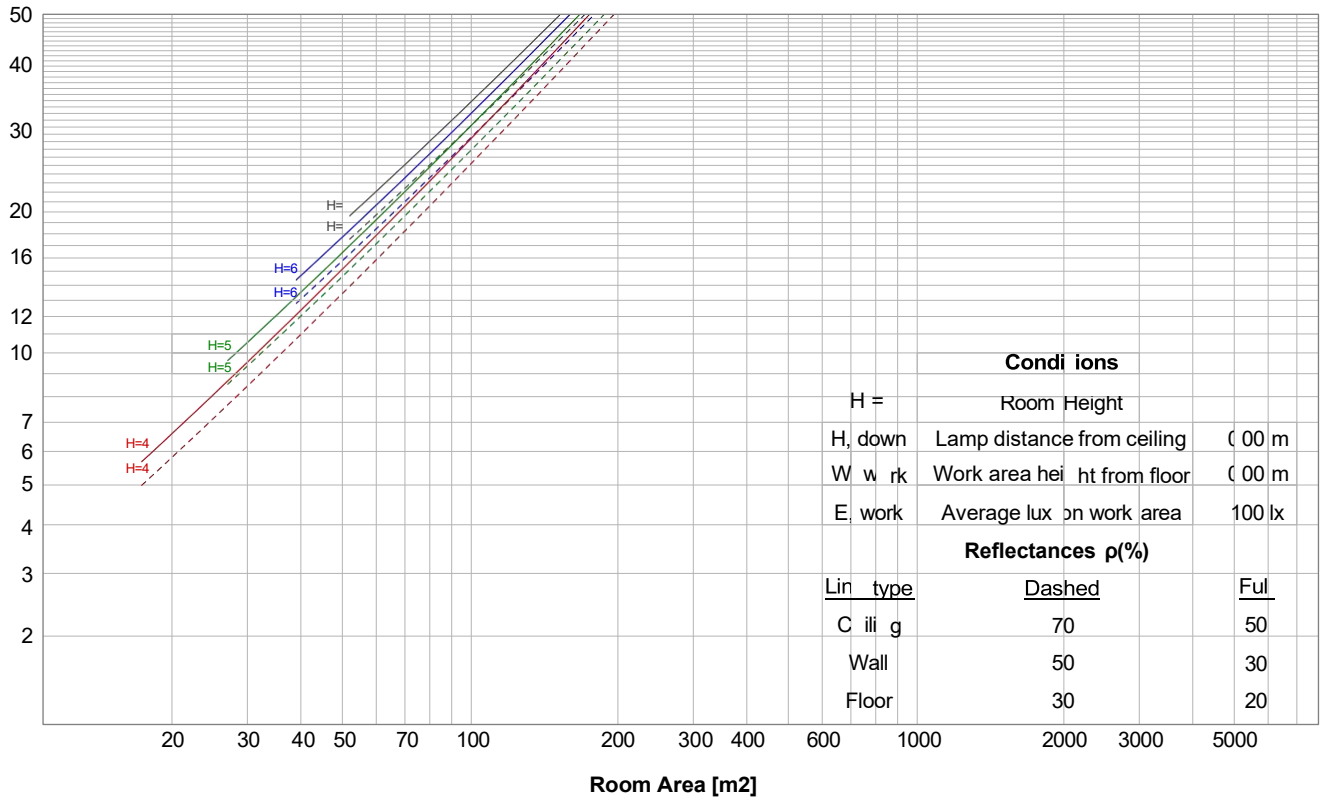


Light Measurement Results

Iso-intensity Diagram (Iso-candela)

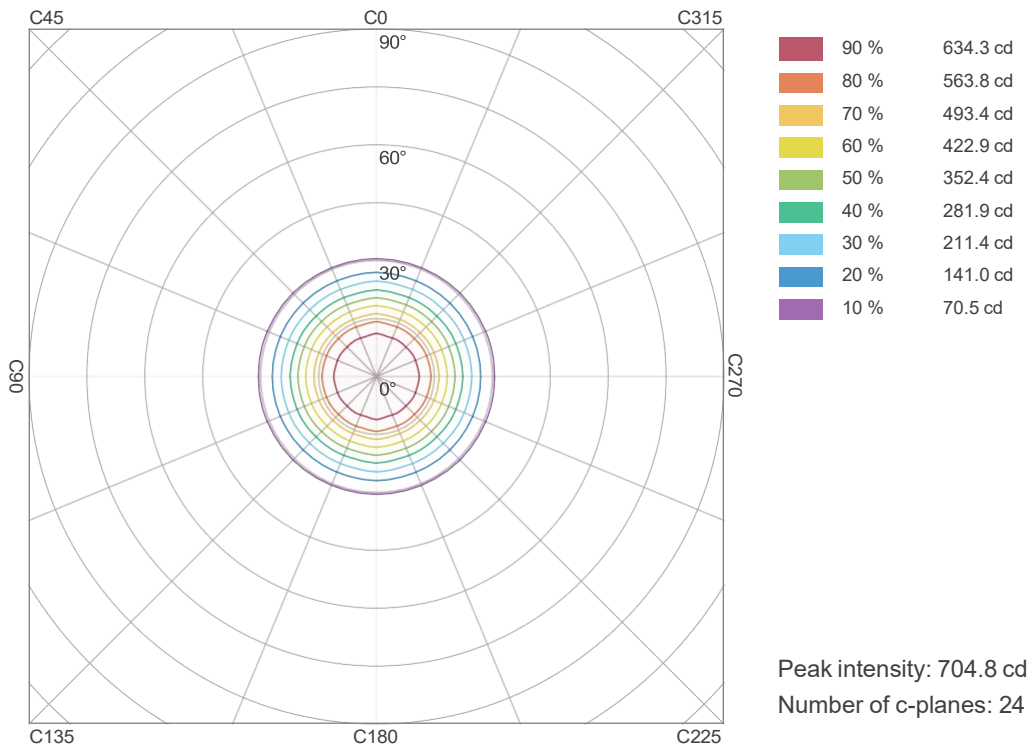


Iso-illuminance Diagram (Iso-lux)

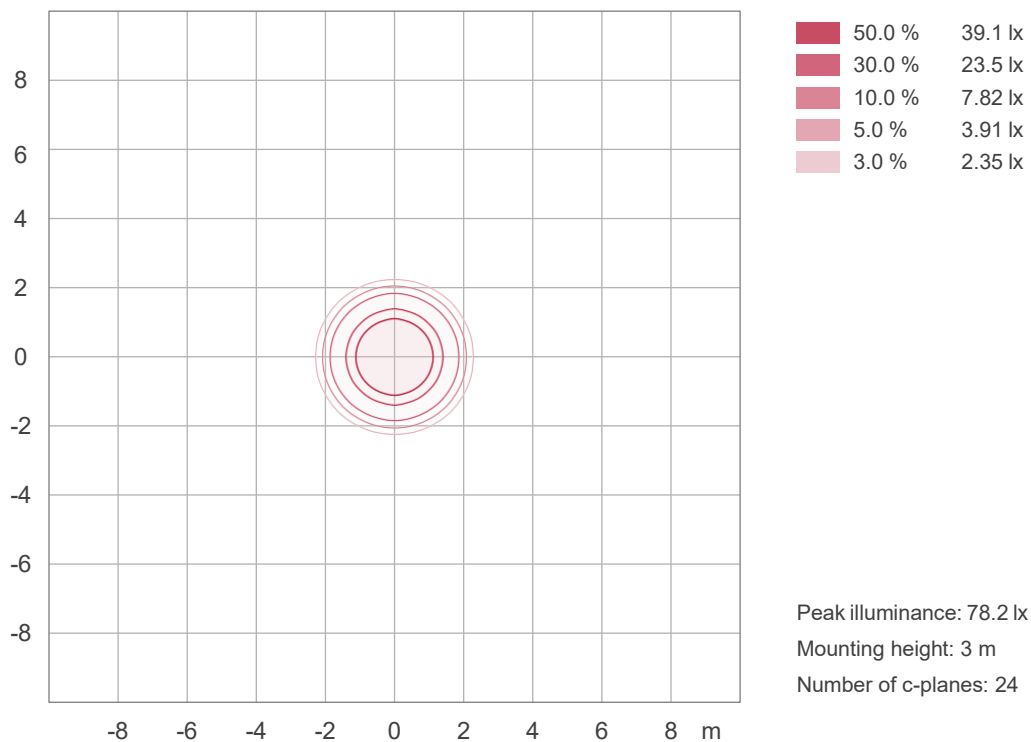


Light Measurement Results

Linear intensity distribution diagram

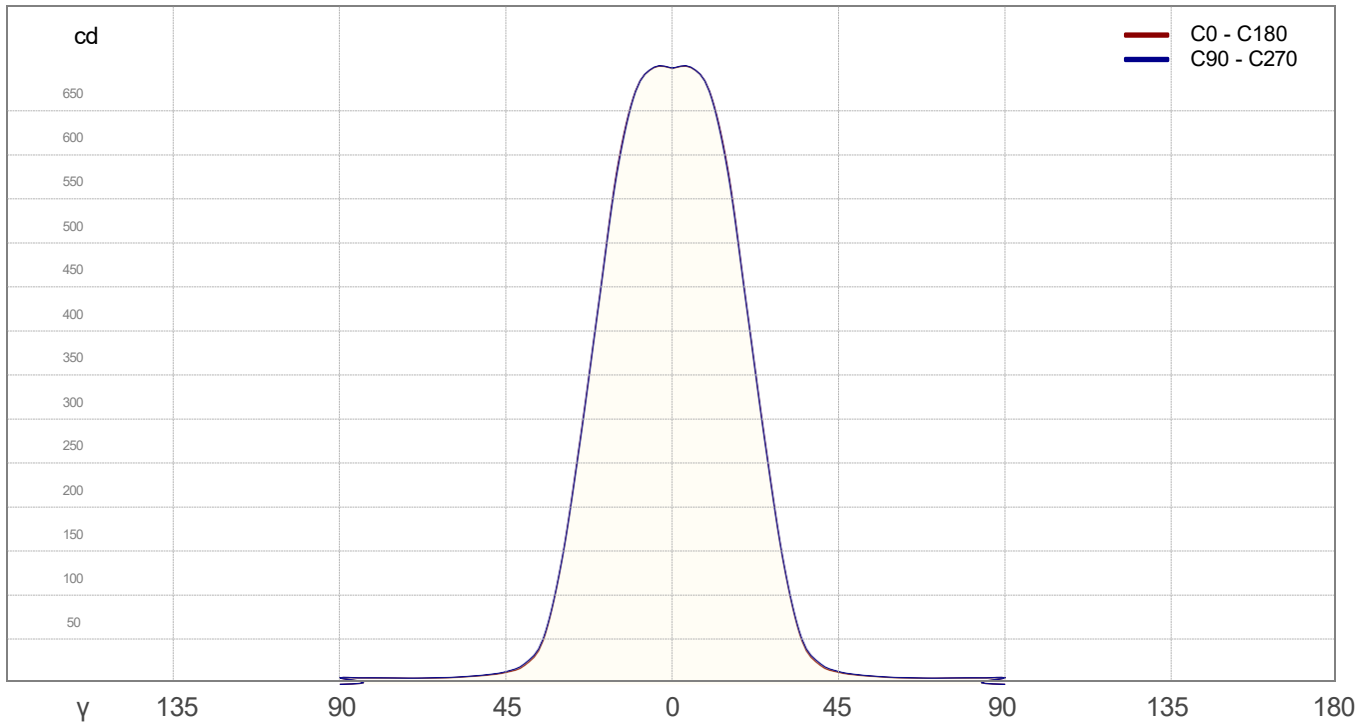

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B1 U0 G0

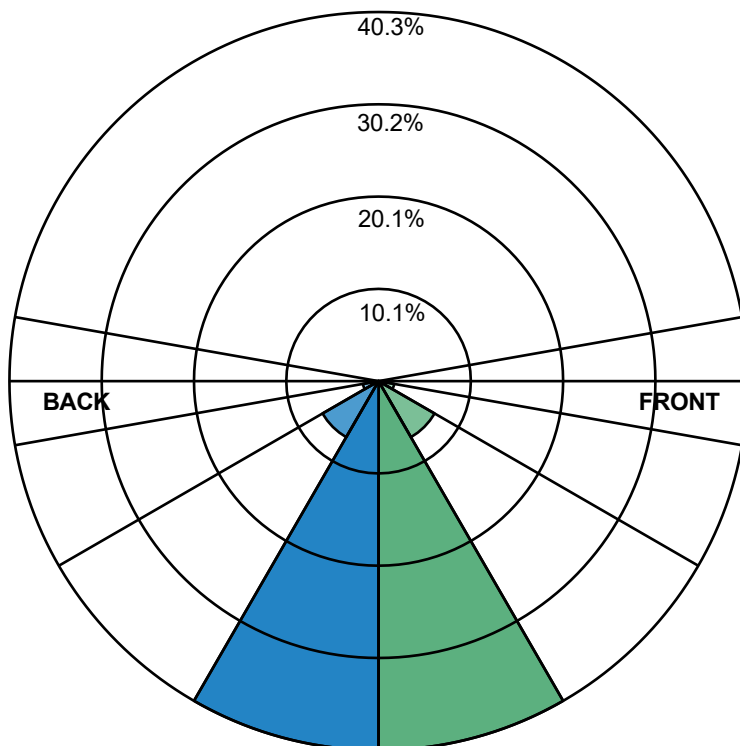

Forward Light

Low (0-30°)	172.9 lm	40.3%
Medium (30-60°)	30.3 lm	7.1%
High (60-80°)	7.5 lm	1.7%
Very High (80-90°)	4.0 lm	0.9%

Back Light

Low (0-30°)	172.9 lm	40.3%
Medium (30-60°)	30.3 lm	7.1%
High (60-80°)	7.5 lm	1.7%
Very High (80-90°)	4.0 lm	0.9%

Uplight

Low (90-100°)	0.0 lm	0.00%
High (100-180°)	0.0 lm	0.0%

Total

Sum	429.2 lm	100,0%
-----	----------	--------