

# Light Measurement Results

## Laboratory and Equipment

Test lab	n/a
Spectrometer Manufacturer and Model	n/a, n/a – n/a
Measurement date	1/31/2026

## Measurement Conditions

Tested c-planes	24
Tested gamma angles	37 – 5.00°
Input Power	3.66 W


## Tested Light Source

Luminaire	RIM-10101-30
Basic Luminous Shape	PANEL
Item No.	
Manufacturer	RIMCLED

## Main Light Measurement Results


Output – Total Lumen (Up% / Down%)	429.2 lm – 0.0205% / 99.98%
Efficiency	117.3 lm/W
Peak Intensity	617.5 cd
Correlated Color Temperature, CCT	3151 K
Color Rendering Index	CRI 95.2

## Polar light distribution diagram

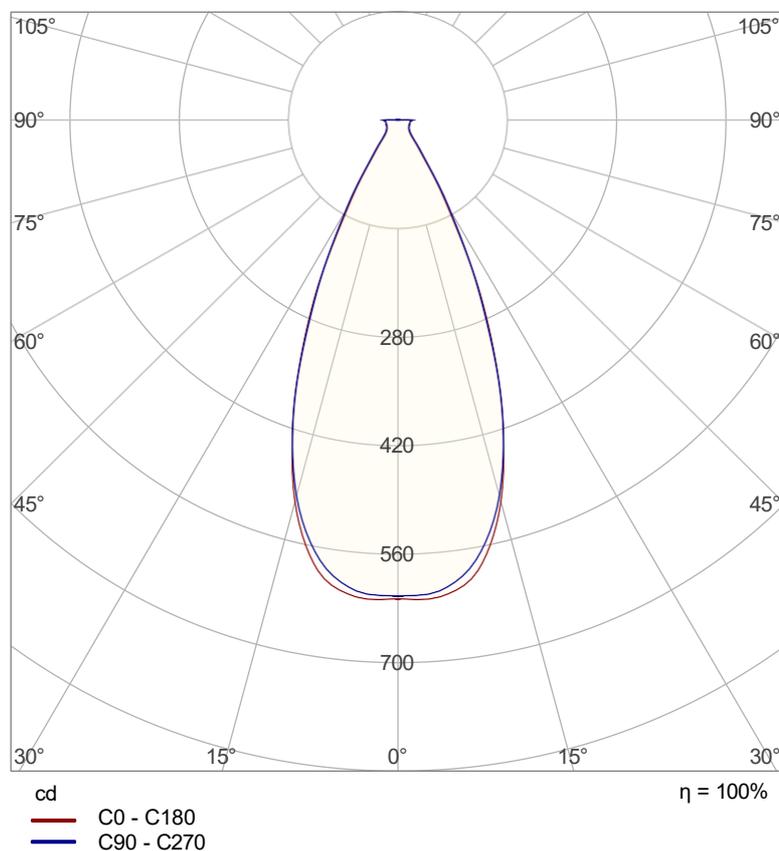


# Light Measurement Results

## Beam details

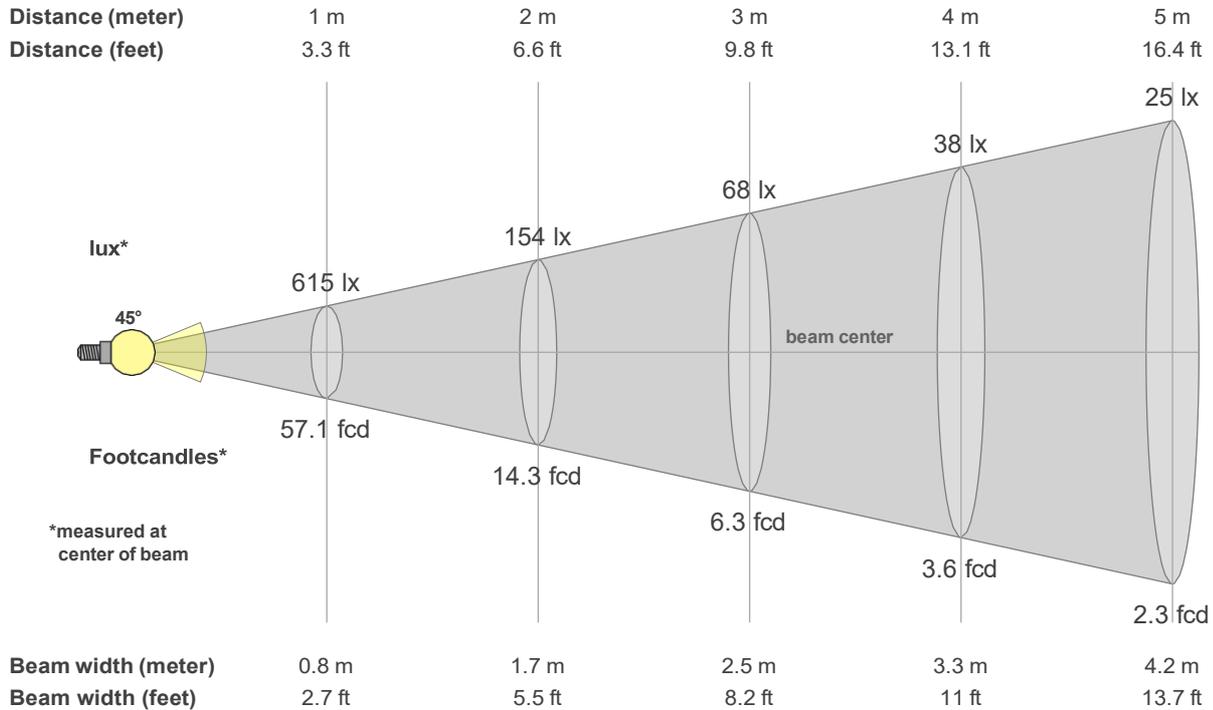


## Luminaire budgetary diagram

LAMPS (number of lamps)

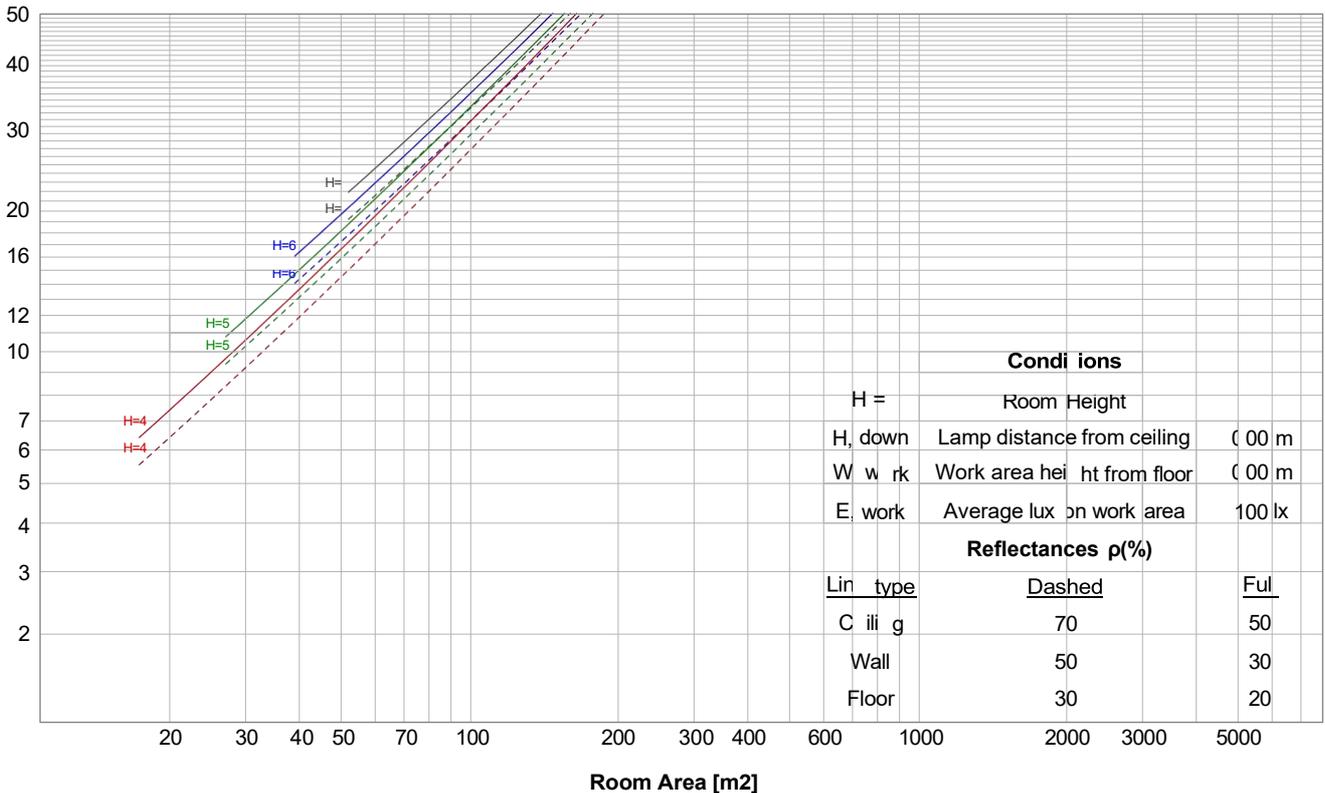


# Light Measurement Results

## Iso-intensity Diagram (Iso-candela)

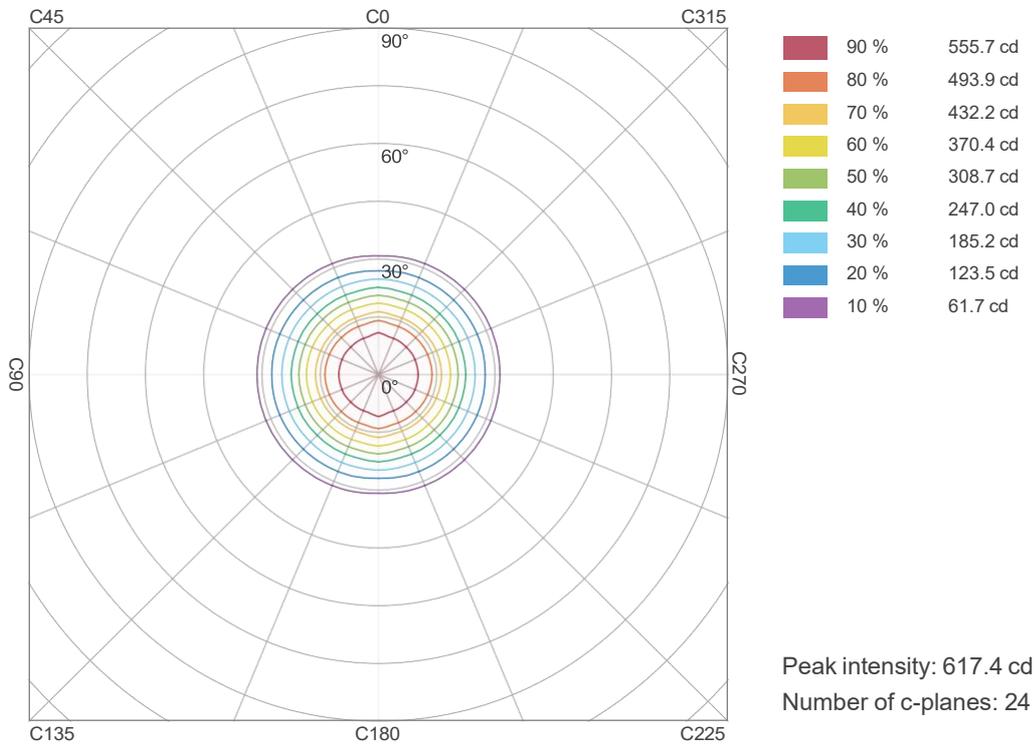


## Iso-illuminance Diagram (Iso-lux)

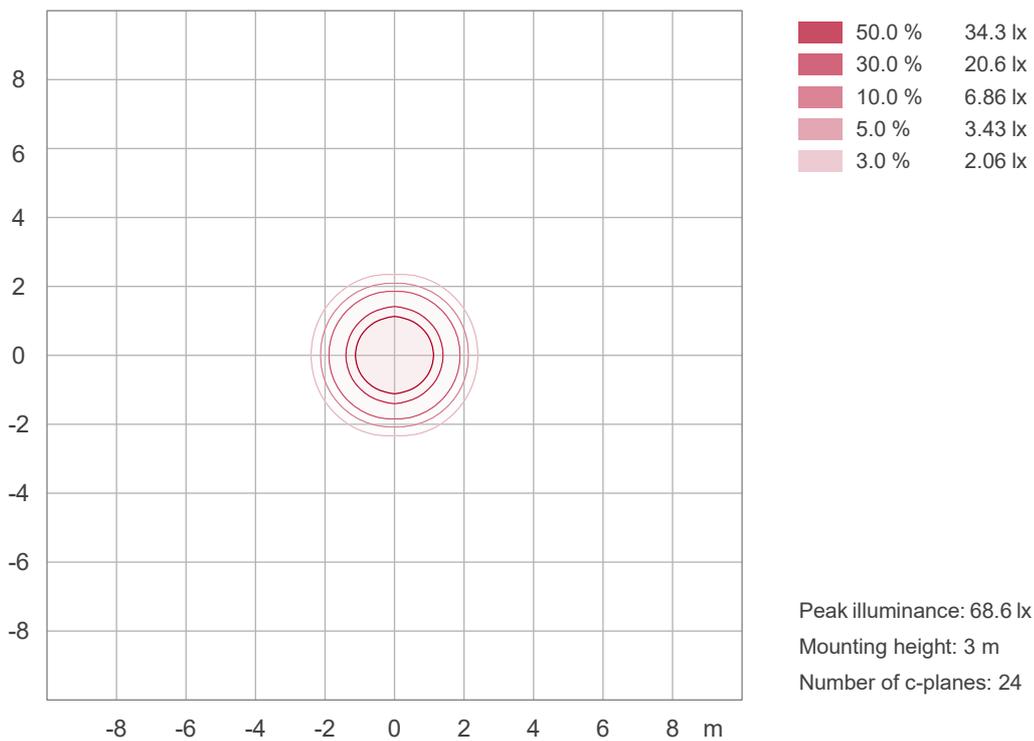


# Light Measurement Results

## Linear intensity distribution diagram

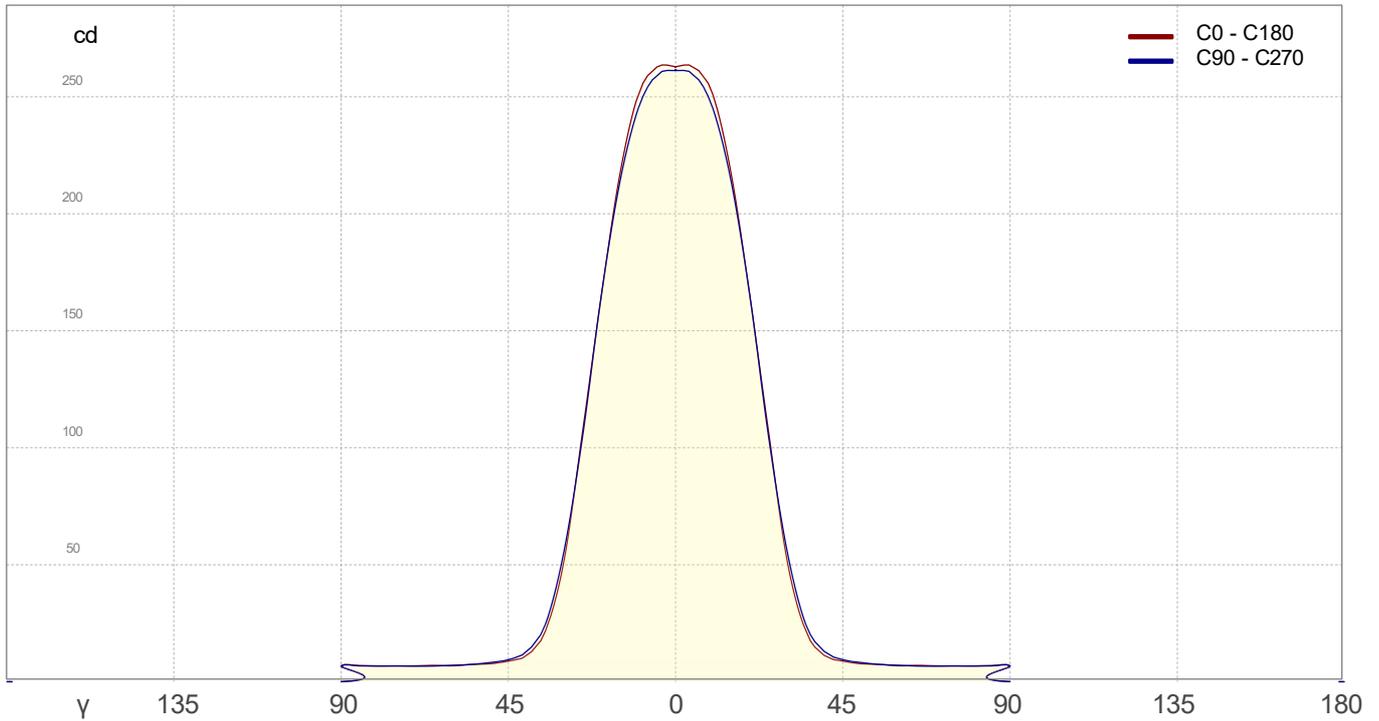

## IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B1 U0 G0

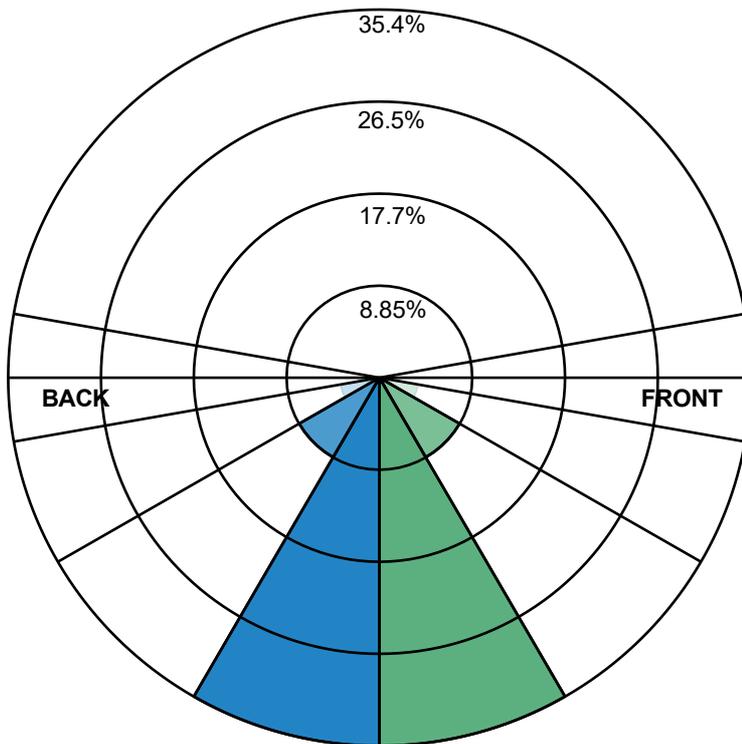

### Forward Light

Low (0-30°)	151.9 lm	35.4%
Medium (30-60°)	37.8 lm	8.8%
High (60-80°)	16.3 lm	3.8%
Very High (80-90°)	8.6 lm	2.0%

### Back Light

Low (0-30°)	151.9 lm	35.4%
Medium (30-60°)	37.8 lm	8.8%
High (60-80°)	16.3 lm	3.8%
Very High (80-90°)	8.6 lm	2.0%

### Uplight

Low (90-100°)	0.0 lm	0.00%
High (100-180°)	0.0 lm	0.0%

### Total

Sum	429.2 lm	100,0%
-----	----------	--------